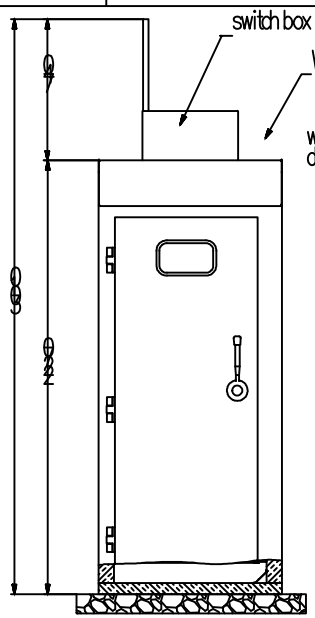

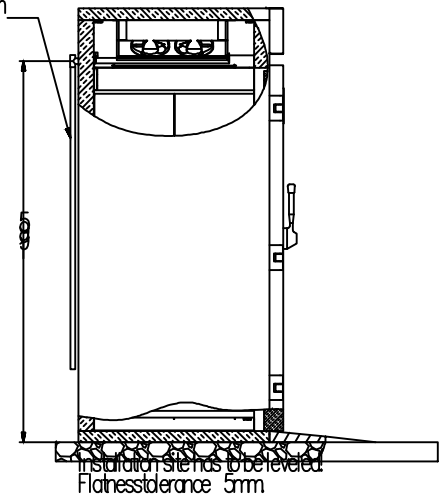

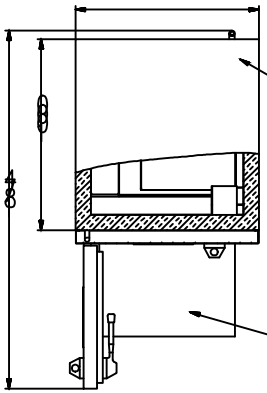

switch box with CEE-connector

Minimum required space with opped door:

depth: 1900mm
width: 1000mm
height: 3010mm

water outlet-drain should be fitted with water trap to prevent odours from main drain entering the unit (not supplied)

WA = water drain
WZ = water intake
EZ = supply line

water intake 3/8"
water drain DN 25

drain height from OKFF:
2020 mm

At this place, at a hight of 2340mm from OKFF, a water intake (3/8") eqipped with a shut off valve (0-4 bar) with a flow pressure of 0,8 bar should be installed. After the fine filter only the fermantation device is allowed to be connected.

Max. height of baking trolleys under DEWA-System: 1890 mm

Wachtel GmbH, Hans-Sachs-Str. 2-6, D-40721 Hilden, Tel.: 02103/49040, Fax: 02103/41940	SCHUTZVERMERK NACH DIN 34 BEACHTEN	Schweißnahte DIN 8553-13	Allgemeintoleranz DIN ISO 2768m
Bearb.: 13.01.2015 GD	Änderungsbez. Rahmen-Nr.:	Werkstoff	DIN 50 JN
Gepr.: Datum Name	Serie: Cobox VA	Typ: 6080 5 B	
Ersetzt für:	Baugruppe/Kurzbez.: Unibak / t		
Ersetzt durch:	Benennung: N Oslo		
Zeichnungsart:	Cobox VA 6080 5 B, TA L		
Datum: 10.04.2014 Ident-Nr.:	Construction drawing		

Gewicht	kg ( )
Maßstab	
Format	A3
Toleranzerwerbung	
Stückliste-Nr.:	
Konv-Nr.:	10885
Maß-Nr.:	
Artikel-Nr.:	
Blatt	1 von 1
Zeichnungsnummer	1004324 — Index

Unregistered Version - http://www.anydwg.com