

PASTRY CABINET

POSITIVE CONSERVATION CABINET

46

The Pastry Cabinets 46 are cold positive temperature conservation cabinets, of 1 compartment 1 door, designed to receive 400x600 trays for the storage of finished and semi-finished pastry products with coatings and icings.



technical data	
Size of supports	400x600
Support entry size	400
Number of supports per level	1
Number of doors	1
Number of levels	24
Spacing out of levels	63 mm
Level depth	600
Refrigerating power of the unit at -10°C	0,56 kW
Fluid	R448A
Packing (LxPxH)	740x1040x2320 mm
connections	
Electrical supply	220-240V / IPH+N+T
Frequency	50 Hz
Power	0,5 kW
Rated current	4 A

NON CONTRATUAL DATA

Options


- Double glazed door with LED lighting.
- Cabinet delivered disassembled.

Features


- + Refrigerating unit mounted in the upper part to ensure an optimal use of space.
- + Temperatures : +1°C to +6°C.
- + Defrosting system with resistors.
- + Panels insulated with polyurethane foam 43kg/m³ (propellant : water), high pressure, thickness 60mm, sheet metal 6/10 with food-grade PVC coating (delivered fully assembled, dismantled on request).
- + Door seals in black TPE.
- + Equipped in standard with a built-in H.T.A (High Ambient Temperature) unit.
- + Batteries are protected by a reinforced cataphoresis treatment.
- + Damper on door.
- + Flush tactile control panel.
- + The compartment can be 100 % dismantled.

IMPLEMENTATION


DIMENSIONS AND CONNECTIONS

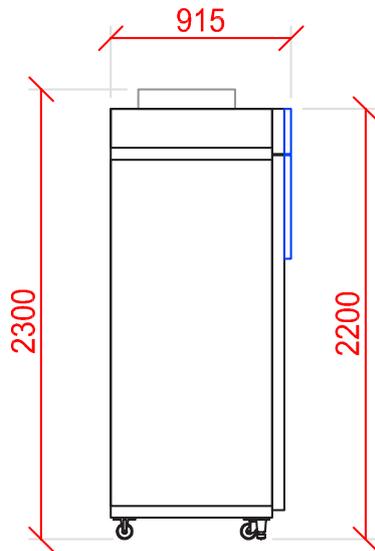



side view

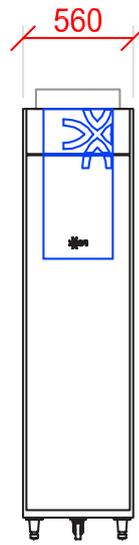

front view

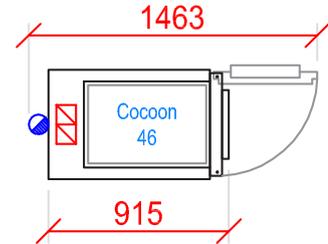

top view

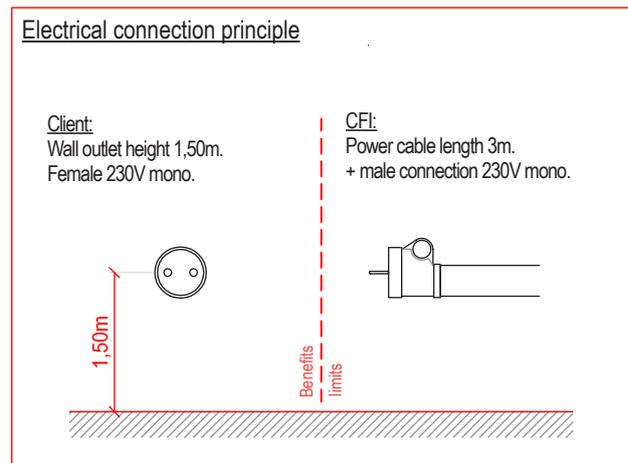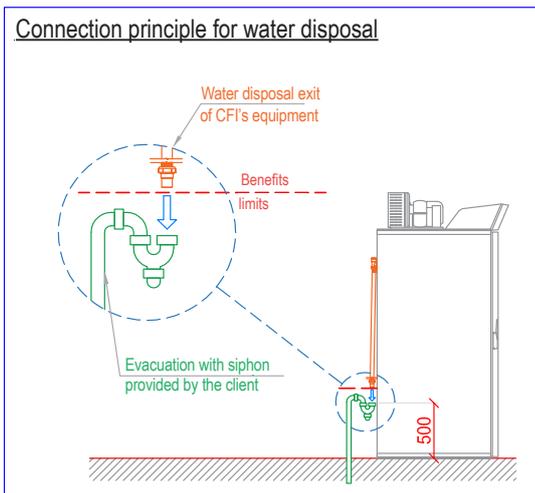

electrical connections principle



ALWAYS, EVERLASTING GOODS

CFI - Rue Benoit Frachon - 26800 PORTES-LES-VALENCE (France)
Phone : +33 (0) 475 575 500 - Email : contact@froid-cfi.fr - www.froid-cfi.fr

PASTRY CABINET

POSITIVE CONSERVATION CABINET

68

The Pastry Cabinets 68 are cold positive temperature conservation cabinets, of 1 compartment 1 door, designed to receive 400x600 trays for the storage of finished and semi-finished pastry products with coatings and icings.



technical data	
Size of supports	400x600
Support entry size	400
Number of supports per level	2
Number of doors	1
Number of levels	24
Spacing out of levels	63 mm
Level depth	600
Refrigerating power of the unit at -10°C	1,16 kW
Fluid	R448A
Packing (LxPxH)	940 x 1240 x 2360mm
connections	
Electrical supply	220-240V / IPH+N+T
Frequency	50 Hz
Power	0,9 kW
Rated current	6 A

NON CONTRATUAL DATA

Options


- Double glazed door with LED lighting.
- Cabinet delivered disassembled.

Features


- + Refrigerating unit mounted in the upper part to ensure an optimal use of space.
- + Temperatures : +1°C to +6°C.
- + Defrosting system with resistors.
- + Panels insulated with polyurethane foam 43kg/m³ (propellant : water), high pressure, thickness 60mm, sheet metal 6/10 with food-grade PVC coating (delivered fully assembled, dismantled on request).
- + Door seals in black TPE.
- + Equipped in standard with a built-in H.T.A (High Ambient Temperature) unit.
- + Batteries are protected by a reinforced cataphoresis treatment.
- + Damper on door.
- + Flush tactile control panel.
- + The compartment can be 100 % dismantled.

IMPLEMENTATION


DIMENSIONS AND CONNECTIONS

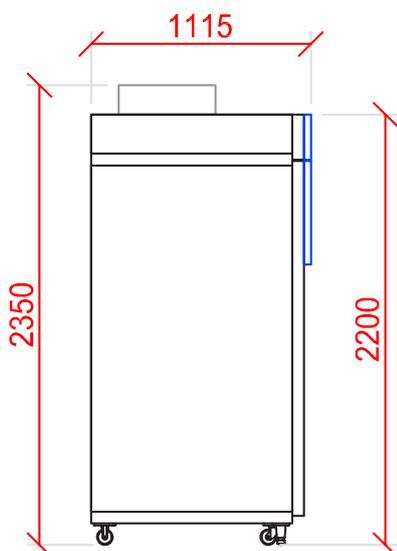



side view

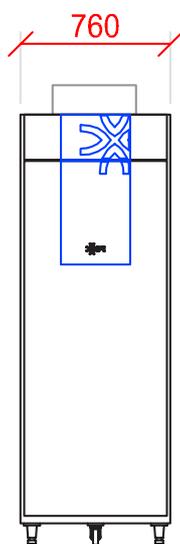

front view

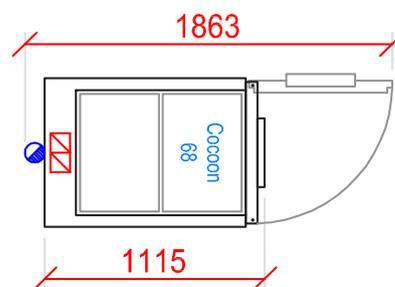

top view

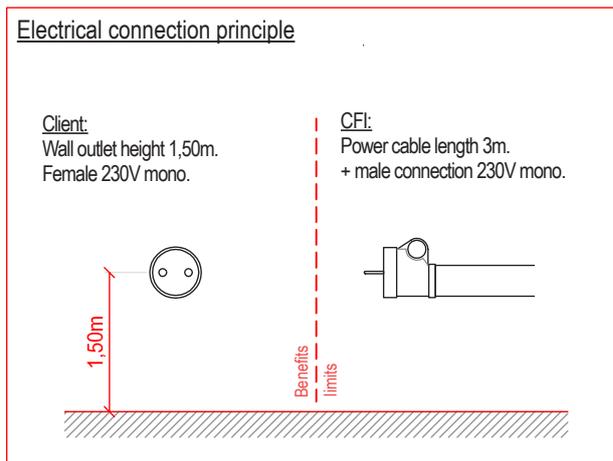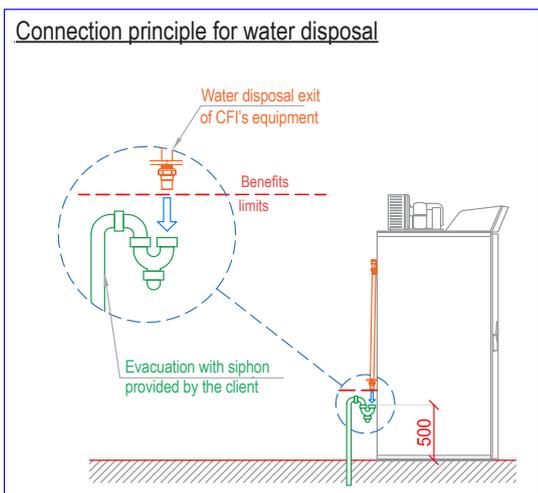

electrical connections principle



**ALWAYS,
EVERLASTING GOODS**

CFI - Rue Benoit Frachon - 26800 PORTES-LES-VALENCE (France)
Phone : +33 (0) 475 575 500 - Email : contact@froid-cfi.fr - www.froid-cfi.fr