BLUE CARE
POSITIVE CONSERVATION CABINET

46

BLUE CARE 46 are one-compartment, one-door Positive Conservation Cabinets designed to hold 400x600mm trays, for the conservation of finished and semi-finished products. They perfectly preserve toppings and glazes.

technical data	
Number of doors	1
Operating temperature	-5°C to +10°C
Number of levels	20
Spacing between levels	57 mm
Gross capacity	489 L
Refrigerating power at -10°C	406 W
Fluid	R290
Unit	Built-in
Defrost	hot gas
Valve	Supplied standard with solenoid
Gross weight	130 kg
Dimensions (LxPxH)	630 x 815 x 2085 mm
Packing (LxPxH)	835 x 930 x 2138 mm
connections	
Electrical supply	220-240V / IPH+T
Frequency	50 Hz
Absorbed power	220 W
Rated current	1,0 A
energy performance	
Energetic class	B
Energy efficiency index	29,2
Annual consumption	329 kW/year
24h consumption	0,901 kW/h/24h
Climate class	5

Features

- Equipped with 20 pairs of slides for 400x600mm grids.
- AISI 304 stainless steel grids and slide rails.
- Control with flush-mounted electronic display.
- Self-closing door with 105° stop, right-hand hinges.
- Lock with key.
- Indirect-ventilated refrigeration.
- Easily replaceable magnetic door seals.
- AISI 304 stainless steel handle, 2mm thick.
- 75mm thick, CFC/HCFC-free insulation.
- AISI 304 stainless steel exterior and interior finish.
- Galvanized/colaminated steel exterior back, bottom and interior of technical compartment.
- Rounded internal corners for maximum hygiene.
- Automatic ventilation shut-off when door is opened.
- Feet in AISI 304 stainless steel, height-adjustable from 100 to 150mm.
- LED interior lighting.
- Optional door pedal and wheels kit.

NON CONTRACTUAL DATA

IMPLEMENTATION
DIMENSIONS AND CONNECTIONS

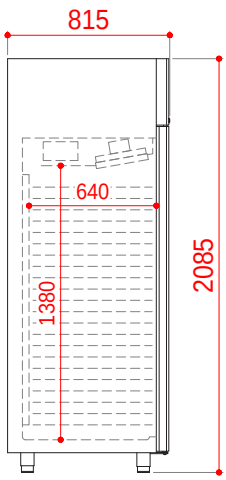

side view

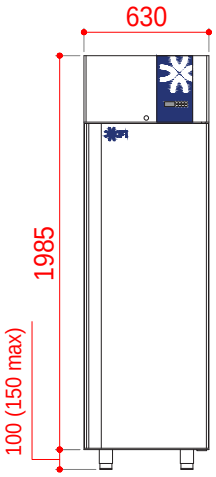

front view



top view

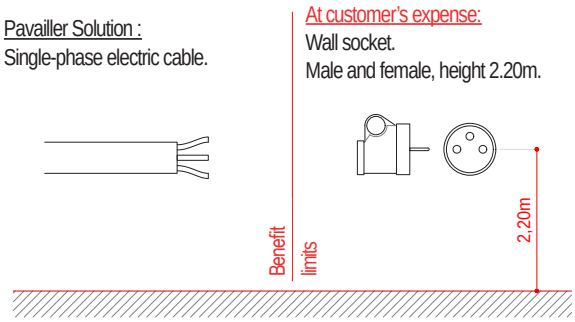

electrical installation principle

Non contractual documentation - 04/2024

ALWAYS, EVERLASTING GOODS

CFI - 555 Rue Benoit Frachon - 26800 PORTES-LES-VALENCE (France)
Phone : +33 (0) 475 575 500 - Email : contact@froid-cfi.com - www.froid-cfi.fr

BLUE CARE
POSITIVE CONSERVATION CABINET

64

BLUE CARE 64 are one-compartment, one-door Positive Conservation Cabinets designed to hold 600x400mm trays, for the conservation of finished and semi-finished products. They perfectly preserve toppings and glazes.

technical data	
Number of doors	1
Operating temperature	-5°C to +10°C
Number of levels	20
Spacing between levels	57 mm
Gross capacity	573 L
Refrigerating power at -10°C	533 W
Fluid	R290
Unit	Built-in
Defrost	hot gas
Valve	Supplied standard with solenoid
Gross weight	140 kg
Dimensions (LxPxH)	810 x 715 x 2085 mm
Packing (LxPxH)	905 x 830 x 2138 mm
connections	
Electrical supply	220-240V / IPH+T
Frequency	50 Hz
Absorbed power	280 W
Rated current	1,3 A
energy performance	
Energetic class	B
Energy efficiency index	27
Annual consumption	303 kW/year
24h consumption	0,83 kW/h/24h
Climate class	5

Features

- Equipped with 20 pairs of slides for 400x600mm grids.
- AISI 304 stainless steel grids and slide rails.
- Control with flush-mounted electronic display.
- Self-closing door with 105° stop, right-hand hinges.
- Lock with key.
- Indirect-ventilated refrigeration.
- Easily replaceable magnetic door seals.
- AISI 304 stainless steel handle, 2mm thick.
- 75mm thick, CFC/HCFC-free insulation.
- AISI 304 stainless steel exterior and interior finish.
- Galvanized/colaminated steel exterior back, bottom and interior of technical compartment.
- Rounded internal corners for maximum hygiene.
- Automatic ventilation shut-off when door is opened.
- Feet in AISI 304 stainless steel, height-adjustable from 100 to 150mm.
- LED interior lighting.
- Optional door pedal and wheels kit.

NON CONTRACTUAL DATA

IMPLEMENTATION
DIMENSIONS AND CONNECTIONS

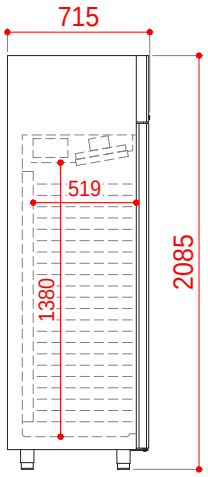

side view

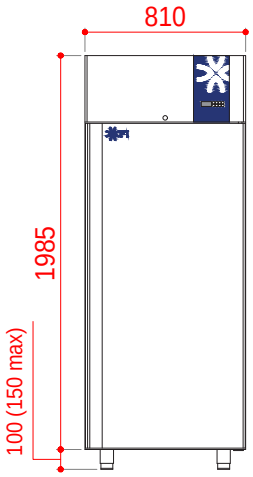

front view



top view

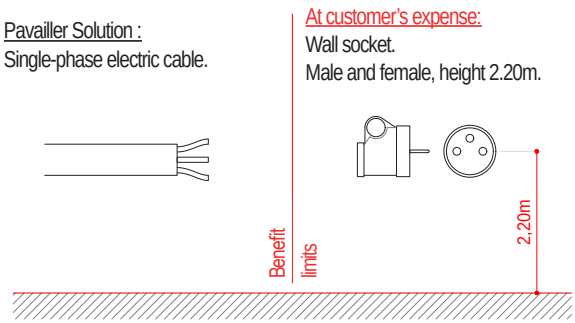

electrical installation principle

Non contractual documentation - 04/2024

ALWAYS, EVERLASTING GOODS

CFI - 555 Rue Benoit Frachon - 26800 PORTES-LES-VALENCE (France)
Phone : +33 (0) 475 575 500 - Email : contact@froid-cfi.com - www.froid-cfi.fr

BLUE CARE
POSITIVE CONSERVATION CABINET

68

BLUE CARE 68 are one-compartment, one-door Positive Conservation Cabinets designed to hold 600x800mm trays, for the conservation of finished and semi-finished products. They perfectly preserve toppings and glazes.

technical data	
Number of doors	1
Operating temperature	-5°C to +10°C
Number of levels	20
Spacing between levels	57 mm
Gross capacity	872 L
Refrigerating power at -10°C	533 W
Fluid	R290
Unit	Built-in
Defrost	hot gas
Valve	Supplied standard with solenoid
Gross weight	170 kg
Dimensions (LxPxH)	810 x 1015 x 2085 mm
Packing (LxPxH)	905 x 1130 x 2258 mm
connections	
Electrical supply	220-240V / IPH+T
Frequency	50 Hz
Absorbed power	280 W
Rated current	1,3 A
energy performance	
Energetic class	B
Energy efficiency index	32,8
Annual consumption	537 kW/year
24h consumption	1,471 kW/h/24h
Climate class	5

NON CONTRACTUAL DATA

Features

- Equipped with 20 pairs of slides for 400x600mm grids.
- AISI 304 stainless steel grids and slide rails.
- Control with flush-mounted electronic display.
- Self-closing door with 105° stop, right-hand hinges.
- Lock with key.
- Indirect-ventilated refrigeration.
- Easily replaceable magnetic door seals.
- AISI 304 stainless steel handle, 2mm thick.
- 75mm thick, CFC/HCFC-free insulation.
- AISI 304 stainless steel exterior and interior finish.
- Galvanized/colaminated steel exterior back, bottom and interior of technical compartment.
- Rounded internal corners for maximum hygiene.
- Automatic ventilation shut-off when door is opened.
- Feet in AISI 304 stainless steel, height-adjustable from 100 to 150mm.
- LED interior lighting.
- Optional door pedal and wheels kit.

IMPLEMENTATION
DIMENSIONS AND CONNECTIONS

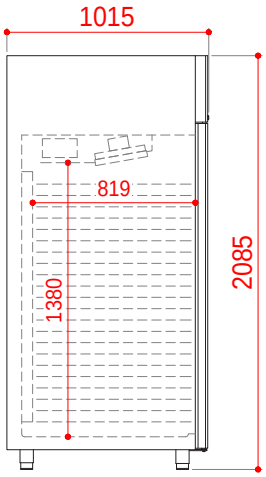

top view

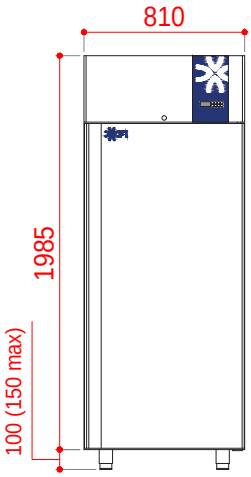

front view

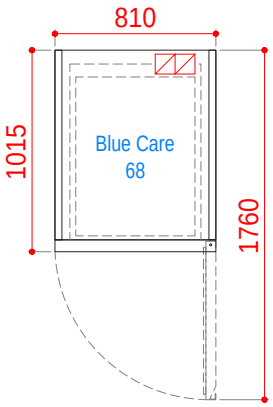

top view

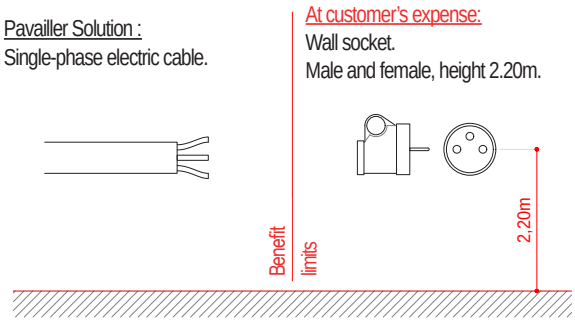

electrical installation principle

Non contractual documentation - 04/2024

POSITIVE CABINET

GN 2/1 - 700L

700

The Positive Conservation Cabinets 700, with one compartment and one door, are designed to receive GN2/1 format trays, for the conservation of finished and semi-finished products. They perfectly preserve toppings and glazes.

technical data	
Number of doors	1
Operating temperature	-2°C to +8°C
Number of levels	17
Spacing between levels	75 mm
Gross capacity	601 L
Refrigerating power at -10°C	406 W
Fluid	R290
Unit	Built-in
Defrost	hot gas
Valve	Supplied standard with solenoid
Gross weight	140 kg
Dimensions (LxPxH)	740 x 815 x 2085 mm
Packing (LxPxH)	835 x 930 x 2138 mm
connections	
Electrical supply	220-240V / IPH+T
Frequency	50 Hz
Absorbed power	220 W
Rated current	1,0 A
energy performance	
Energetic class	A
Energy efficiency index	24,9
Annual consumption	335 kW/year
24h consumption	0,918 kW/h/24h
Climate class	5

Features

- Equipped for 3 pairs of slide rails for GN2/1 grids, 3 plastic-coated grids GN2/1.
- AISI 304 stainless steel grids and slide rails.
- Control with flush-mounted electronic display.
- Self-closing door with 105° stop, right-hand hinges.
- Lock with key.
- Easily replaceable magnetic door seals.
- PVC handle.
- 75mm thick, CFC/HCFC-free insulation.
- AISI 304 stainless steel exterior and interior finish.
- Galvanized/colaminated steel exterior back, bottom and interior of technical compartment.
- Rounded internal corners for maximum hygiene.
- Feet in AISI 304 stainless steel, height-adjustable from 100 to 150mm.
- Optional door pedal and wheels kit.

NON CONTRACTUAL DATA

IMPLEMENTATION
DIMENSIONS AND CONNECTIONS

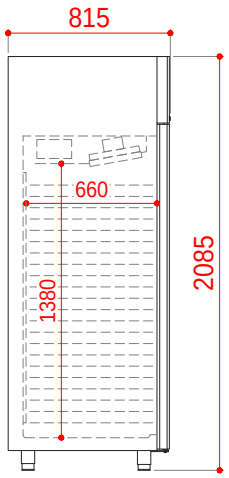

side view

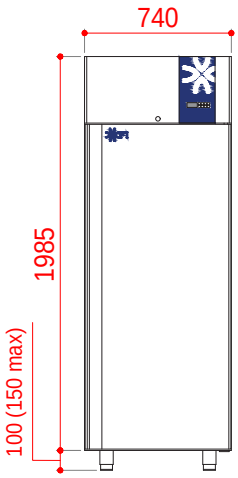

front view

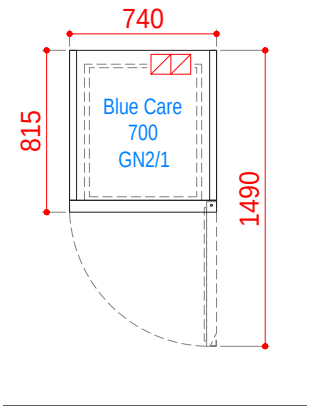

top view

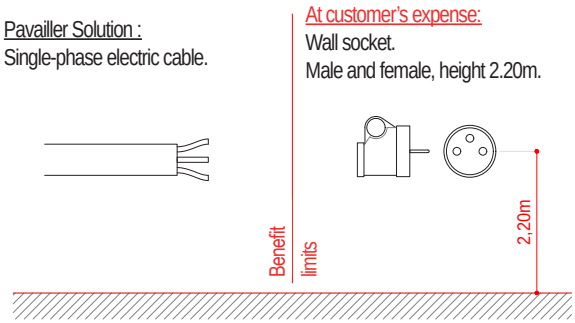

electrical installation principle

Non contractual documentation - 04/2024

ALWAYS,
EVERLASTING GOODS

CFI - 555 Rue Benoit Frachon - 26800 PORTES-LES-VALENCE (France)
Phone : +33 (0) 475 575 500 - Email : contact@froid-cfi.com - www.froid-cfi.fr