REFRIGERATED WORKTABLE

6 doors

The BLUE ROCK 60 are refrigerated worktables, with static positive refrigeration, designed to receive 400x600mm trays or grids.

They exist in remote refrigerating unit version (GD).

technical data	
Size of supports (mm)	400 x 600
Support entry direction	400
Operating température	+2°C to +15°C
Number of doors	6
Max. number of levels	10 (spacing 55 mm)
Standard number of levels per door	7
Number of supports per level	1
Total number of supports	42
Spacing between levels	55 mm
Adjustable every	27,5 mm
Group	1 unit of 3/8 Hp
Refrigerating power at -10°C	0,74 kW
Fluid	R448A
Weight	650 kg
worktable - possible finishes	
Top	S/S - granite - black granite
Splashback	with or withtout
options	
Ventilation	€
Wheels	€
Additional pair of slide rails	€
connections	
Electrical supply	220-240V / MONO ~1PH+N+T /50Hz
Power	1 kW
Rated current	4 A

NON CONTRACTUAL DATA

Features

- Panels in white PVC finish or stainless steel 304 inside / 430 outside, assembled with eccentric hooks and centering devices.
- Monobloc interior fittings can be dismantled without tools.
- Insulating panels in polyurethane foam. High-pressure injection, 60mm thick, 42kg/m^3 density.
- «Butterfly» opening of the doors facilitates the transfer of the trays (reversible on site).
- Magnetized black TPE door seals.
- Pivot hinges, maintained from 90° with door return on closing.
- Electronic regulator.
- Evaporation tray for defrost water.
- Cataphoresis-treated battery.
- Built-in refrigerating unit H.T.A. (High Ambient Temperature, +43°C maximum).
- Granite insulated from cold compartments.
- Fully dismountable range.
- 7 pairs of slide rails supplied as standard.
- Supplied with feet as standard.

IMPLEMENTATION
DIMENSIONS AND CONNECTIONS

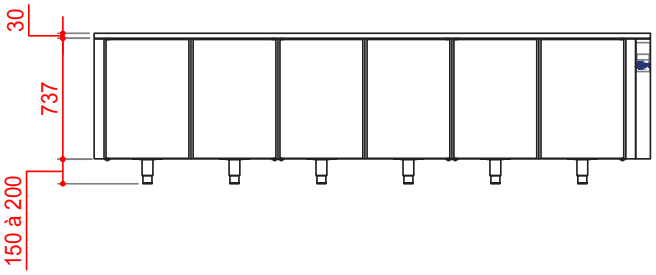

front view - remote unit

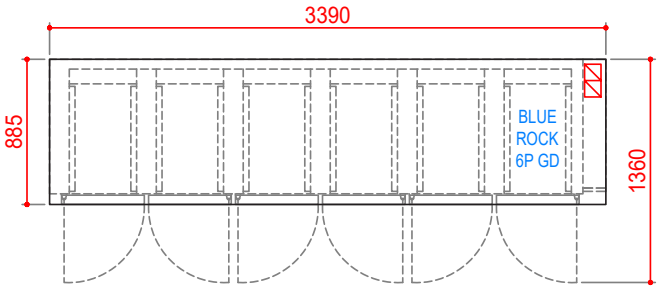

top view - remote unit



side view

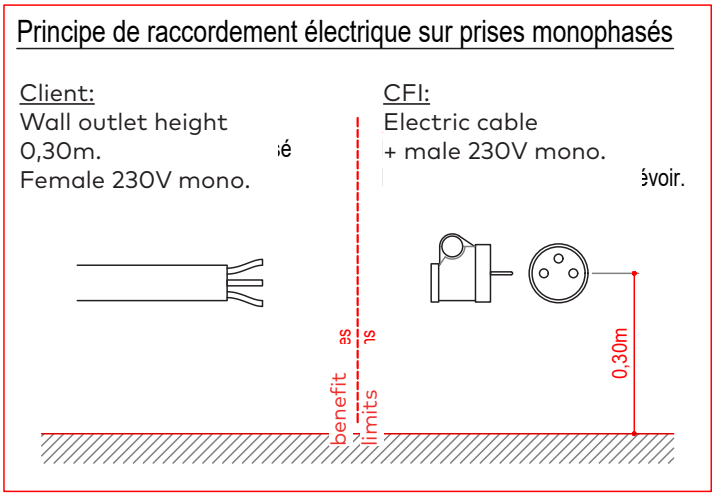

electrical connection principles

Non contractual documentation - 09/2023

CFI - Rue Benoit Frachon - 26800 PORTES-LES-VALENCE (France)
Phone : +33 (0) 475 575 500 - Email : contact@sebp-cfi.fr - www.froid-cfi.fr