

POSITIVE CABINET

GN 2/1 - 1400L

1400

The Positive Conservation Cabinets 1400, with one compartment and two doors, are designed to receive GN2/1 format trays, for the conservation of finished and semi-finished products. They perfectly preserve toppings and glazes.



technical data	
Number of doors	1
Operating temperature	-2°C to +8°C
Number of levels	17 x 2
Spacing between levels	75 mm
Gross capacity	1356 L
Refrigerating power at -10°C	533 W
Fluid	R290
Unit	Built-in
Defrost	hot gas
Valve	Supplied standard with solenoid
Gross weight	220 kg
Dimensions (LxPxH)	1480 x 815 x 2085 mm
Packing (LxPxH)	1575 x 930 x 2144 mm
connections	
Electrical supply	220-240V / IPH+T
Frequency	50 Hz
Absorbed power	260 W
Rated current	1,2 A
energy performance	
Energetic class	B
Energy efficiency index	31,6
Annual consumption	659 kW/year
24h consumption	1,805 kW/h/24h
Climate class	5


Features

- + Equipped for 6 pairs of slide rails for GN2/1 grids, 6 plastic-coated grids GN2/1.
- + AISI 304 stainless steel grids and slide rails.
- + Control with flush-mounted electronic display.
- + Self-closing door with 105° stop, right-hand hinges.
- + Lock with key.
- + Easily replaceable magnetic door seals.
- + PVC handle.
- + 75mm thick, CFC/HCFC-free insulation.
- + AISI 304 stainless steel exterior and interior finish.
- + Galvanized/colaminated steel exterior back, bottom and interior of technical compartment.
- + Rounded internal corners for maximum hygiene.
- + Feet in AISI 304 stainless steel, height-adjustable from 100 to 150mm.
- + Optional door pedal and wheels kit.

NON CONTRACTUAL DATA

IMPLEMENTATION

DIMENSIONS AND CONNECTIONS

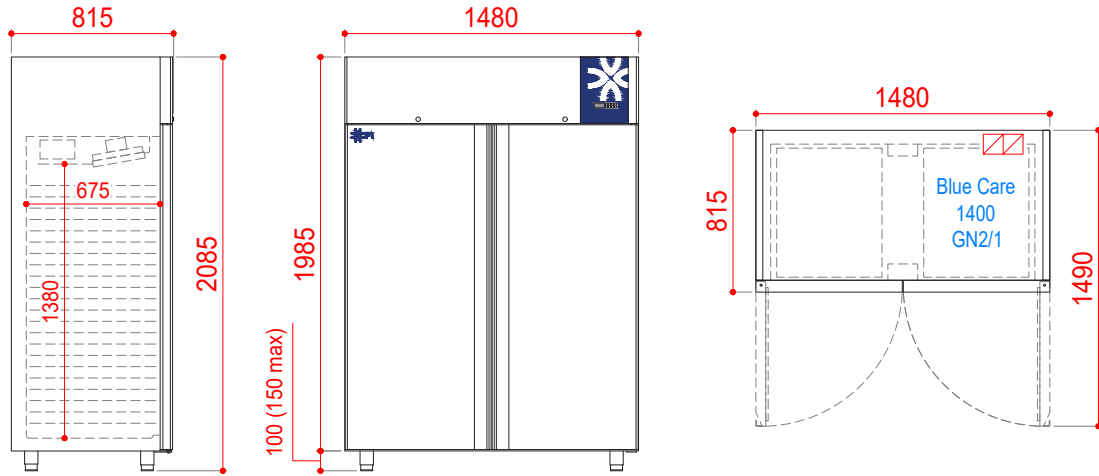


side view

front view


top view



Pavailler Solution :
Single-phase electric cable.



At customer's expense:
Wall socket.
Male and female, height 2.20m.



Benefit limits

2.20m

Non-contractual drawings.

electrical installation principle



ALWAYS, EVERLASTING GOODS

CFI - 555 Rue Benoit Frachon - 26800 PORTES-LES-VALENCE (France)
Phone : +33 (0) 475 575 500 - Email : contact@froid-cfi.com - www.froid-cfi.fr